



Introduction

This programming sheet is used to set the PSC VS800 and Duet Laser scanners to have “~” prefix.


1) Start Bar Code, scanner beeps once, LED flashes continuously indicating programming mode.

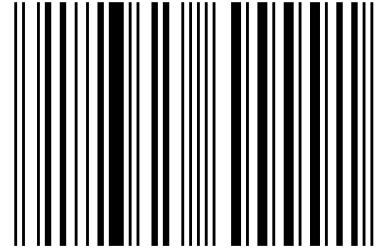

2) Global prefix ~ Bar Code,

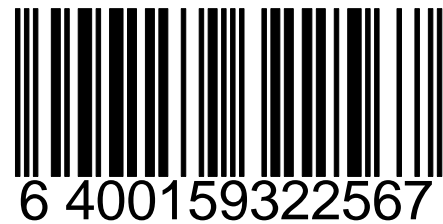

3) End Bar Code, scanner responds with 1 beep, laser goes out, motor stops. After 5 seconds the scanner emits 4 slow beeps and the LED is dimly lit.

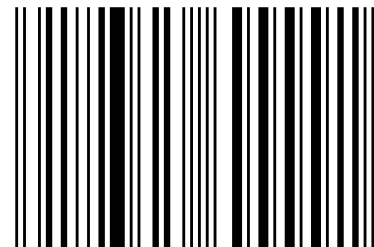

... *First choice of professional systems integrators* ...